

# CHEETAH

## RUGGEDIZED CAMERA SERIES

### C4180 CMOS 12 MP GigE Vision®



#### Imperx: C4180

The C4180 features the ON Semiconductor Python NOIP1xx012KA CMOS image sensor with a native resolution of 4096 x 3072 in a 4/3" optical format. The GenICam™ compliant camera delivers 8.3 frames per second in global shutter mode with the GigE Vision interface. CMOS technology eliminates smear columns from areas of ultra-bright intensity and specular reflections in uncontrolled lighting applications. The Imperx Cheetah camera line provides excellent image quality with Imperx proprietary processing. In addition, Imperx puts you in control and gives you full access to raw data without corrections. Using the simple intuitive Graphical User Interface, you can quickly apply or remove image corrections. Flexibility and image quality make the C4180 suitable for a broad range of diverse and demanding applications. Imperx can help optimize the camera to your exacting requirements.

#### Specifications

Feature	Description	Feature	Description
Interfaces available	GigE Vision	Strobe Output	2 strobes, programmable position and duration
Resolution	4096 x 3072	Pulse Generator	Yes, programmable
Sensor	Python NOIP1xx012KA, CMOS Color/Mono/ENIR	Image Enhancement	Two LUTs: 1 LUT pre-programmed with Gamma 0.45
Sensor Format	18.4 mm (H) x 13.8 mm (V) 23 mm diagonal 4/3" optical format	Data Corrections	Defective/hot pixel correction (static, dynamic), flat field correction, fixed pattern noise correction
Pixel Size	4.5 µm	Lens Mount	F-Mount (default), M42, EF Canon (passive or active)
NIR Sensitivity	Mono: 850nm: 18%, 950nm: 6% ENIR: 850nm: 30%, 950nm: 11%	Supply Voltage Range	12VDC (5V – 33V) 1.5A inrush without enabled Canon controller 12VDC (6.5V – 33V) 1.5A inrush with enabled Canon controller
Shutter	Global shutter (GS)	Camera Current	Typical: 0.52A, Maximum: 0.66A
Fixed Pattern Noise	<0.9 LSB	Size - Width/Height/Length	72.0mm (W) x 72.0mm (H) x 33.8mm (L) – Applies to all interfaces
Digitization	10 bit	Weight	389g
Frame Rate	8.3 fps (8-bit), 4.5 fps (10-bit)	Vibration, Shock	TBD
Pixel Clock	32MHz to 360MHz	Environmental	-40°C to +85°C Operating, -50°C to +90°C Storage
Dynamic Range	59 dB	Humidity	10% to 90% non-condensing
Bit Depth	8, 10 bit	MTBF	>323,000 hours @ 40°C (Telcordia SR-332)
Analog Gain Control	1x, 1.26x, 1.87x, 3.17x	Military Standard	MIL-STD-810F
Digital Gain	1x (0dB) to 15.9 (24 dB) with a precision of 0.001x. (AGC available)	Regulatory	FCC Part 15 Class A, CE, RoHS
White Balance	Manual, auto, off		
Shutter Speed	1 µs/step, 40 µs to 1.0 sec		
Exposure Control	Off, internal, external. (AEC available)		
Regions of Interest (ROI)	1 ROI		
Averaging Decimation	1 x 2, 2 x 1, 2 x 2		
Sub-sampling Decimation	1 x 2, 2 x 1, 2 x 2		
Trigger Inputs	External, pulse generator, software		
Trigger Options	Edge, debounce		
Trigger Modes	Internal, external, software		
External Inputs/Outputs	2 IN (OPTO, LVTTTL) / 2 OUT (OPTO, TTL)		

## Imperx: C4180 Applications

The C4180 incorporates a number of unique features tailored to reduce system complexity, maximize interface bandwidth, and expand the usable operational range.

Aerospace • Satellites • Surveillance • Military and Non-Military Ground Vehicles • Ball Grid Array • Printed Circuit Board Inspection • Motion Analysis • Broadcast Television • Telepresence • Unmanned Aerial Vehicles • Machine Vision • Reconnaissance • Aerospace • Intelligent Traffic Systems • Aerial Imaging • Open Road Tolling Systems • Situational Awareness


## Absolute Quantum Efficiency

QE Curve for Mono & Color




NOIP1xx012KA

QE Curve for Standard & NIR Mono

NOIP1xx012KA

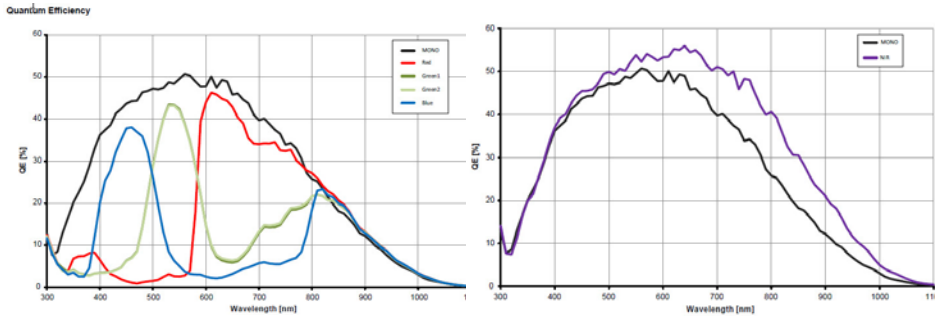

## Dimensions

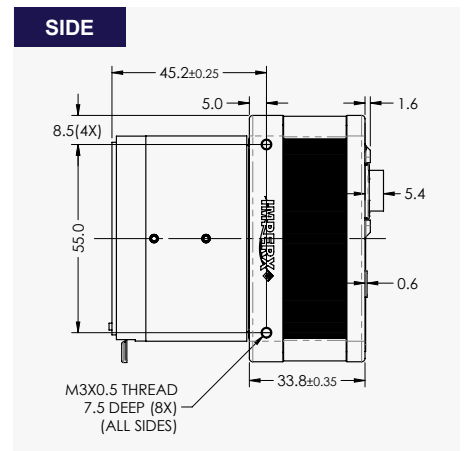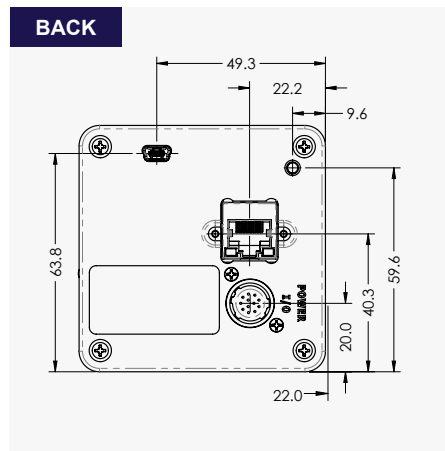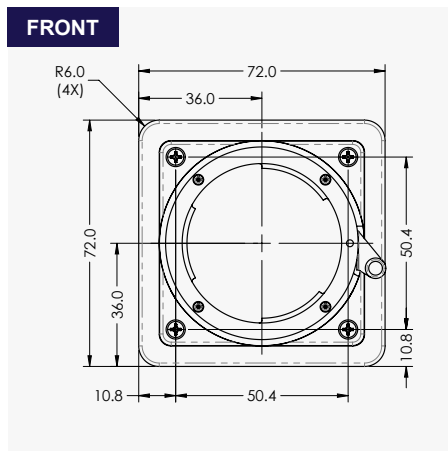

## Ordering Information

**Interface Available**

- GigE Vision®
- Camera Link® Full (CLF)
- USB3

**Sensor Types available**

- Monochrome
- Bayer Color
- NIR

**Lens Mounts**

- F Mount (Default)
- M42
- EF Canon

**Accessories (Sold separately)**


- PS12V04A-Power Supply w/ 1 input and 1 output

## Hirose Connectors

**Power and I/O Interface**

1. 12 VDC Return	7. OUT1 TTL Signal
2. +12 VDC	8. IN1 OPTO +
3. Reserved	9. IN2 TTL Signal
4. Reserved	10. IN1 OPTO -
5. OUT2 OPTO -	11. IN2 TTL Gnd
6. OUT1 TTL Gnd	12. OUT2 OPTO +

## GenICam Compliant Camera Configurator

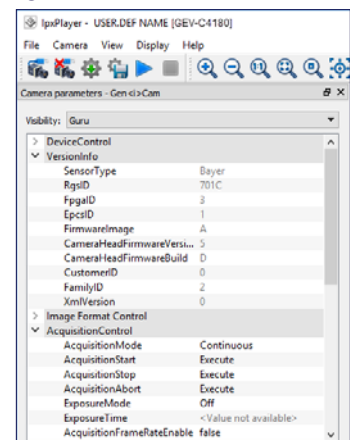

IMPERX 6421 Congress Ave., Boca Raton, FL 33487, USA  
Tel: +1-561-989-0006. Email: sales@imperx.com

Quality Management System ISO 9001:2015 Registered  
Environmental Management System ISO 14001:2015 Registered  
DDTC Registered (Directorate of Defense Trade Controls, US Department of State)

WWW.IMPERX.COM

Technical data has been fully checked, but accuracy of printed matter is not guaranteed. Subject to change without notice. Copyright 2017.