

# CHEETAH

## RUGGEDIZED CAMERA SERIES

### C4181 CMOS 16 MP Dual CXP-6



#### Imperx: C4181

The C4181 features the ON Semiconductor Python NOIP1XX016KA CMOS image sensor with a native resolution of 4096 x 3072 in a 4/3" optical format. The GenICam™ compliant camera delivers up to TBD frames per second in global shutter mode using a dual CXP-6 CoaXPress interface. CMOS technology eliminates smear columns from areas of ultra-bright intensity and specular reflections in uncontrolled lighting applications. The Imperx Cheetah line provides excellent image quality with Imperx proprietary processing. In addition, Imperx puts you in control and gives you full access to raw data without corrections. Using the simple, intuitive Graphical User Interface, you can quickly apply or remove image corrections. Flexibility and image quality make the C4181 suitable for a broad range of diverse and demanding applications. Imperx can help optimize the camera to your exacting requirements.

#### Specifications


Feature	Description	Feature	Description
Interfaces available	2-channel CXP-6 CoaXPress®, USB3, Camera Link® Full (CLF), GigE Vision®	Strobe Output	2 strobes, programmable position and duration
Resolution	4096 x 4096	Pulse Generator	Yes, programmable
Sensor	Python NOIP1XX016KA, CMOS Color/Mono/ENIR	Image Enhancement	Two LUTs: 1 LUT pre-programmed with Gamma 0.45
Sensor Format	18.4 mm (H) x 18.4 mm (V) 26.0 mm diagonal 35mm optical format	Data Corrections	Bad pixel correction (static, dynamic) flat field correction, fixed pattern noise
Pixel Size	4.5 µm	Lens Mount	F-Mount (Default), M42, EF Canon (passive or active)
NIR Sensitivity	Mono: 850nm: 18%, 950nm: 6% ENIR: 850nm: 30%, 950nm: 11%	Power	Power over CXP (PoCXP)
Shutter	Global shutter (GS)	Camera Current	Typical: TBD, Maximum: TBD
Fixed Pattern Noise	<0.9 LSB	Size - Width/Height/Length	72.0mm (W) x 72.0mm (H) x 34.7mm (L) – Applies to all interfaces
Digitization	10 bit	Weight	379g
Frame Rate	TBD	Vibration, Shock	TBD
Pixel Clock	32MHz to 360MHz (TBD)	Environmental	-40°C to +85°C Operating, -50°C to +90°C Storage
Dynamic Range	59 dB	Humidity	10% to 90% non-condensing
Row Overhead Time (ROT)	Zero	MTBF	>323,000 hours @ 40°C (Telcordia SR-332)
Bit Depth	8, 10 bit	Military Standard	MIL-STD-810F
Analog Gain Control	1x, 1.26x, 1.87x, 3.17x	Regulatory	FCC Part 15 Class A, CE, RoHs
Digital Gain	1x (0dB) to 15.9 (24 dB) with a precision of 0.001x. (AGC available)		
AEC/AGC	Yes		
White Balance	Manual, auto, off		
Shutter Speed	1 µs/step, 40 µs to 1.0 sec		
Exposure Control	Off, internal, external. (AEC available)		
Regions of Interest (ROI)	1 ROI		
Averaging Decimation	1 x 2, 2 x 1, 2 x 2		
Sub-sampling Decimation	1 x 2, 2 x 1, 2 x 2		
Trigger Inputs	External, pulse generator, software		
Trigger Options	Edge, debounce		
Trigger Modes	Internal, external, software		
External Inputs/Outputs	2 IN (OPTO, LVTTTL) / 2 OUT (OPTO, TTL)		

## Imperx: C4181 Applications


The C4181 incorporates a number of unique features tailored to reduce system complexity, maximize interface bandwidth, and expand the usable operational range.

Aerospace • Satellites • Surveillance • Military and Non-Military Ground Vehicles • Ball Grid Array • Printed Circuit Board Inspection • Motion Analysis • Broadcast Television • Telepresence • Unmanned Aerial Vehicles • Machine Vision • Reconnaissance • Aerospace • Intelligent Traffic Systems • Aerial Imaging • Open Road Tolling Systems • Situational Awareness

## Absolute Quantum Efficiency

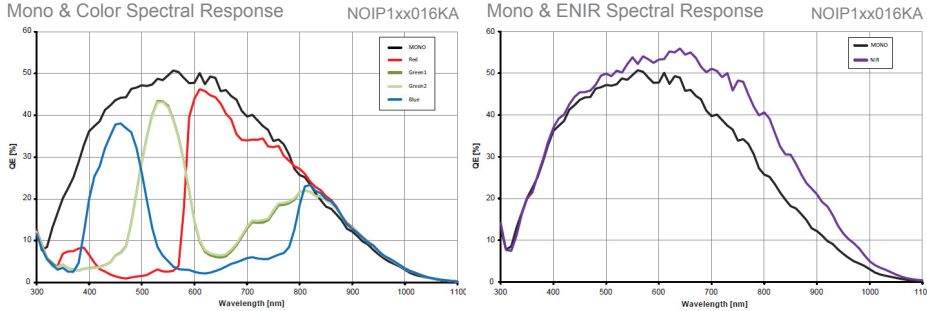


## Dimensions

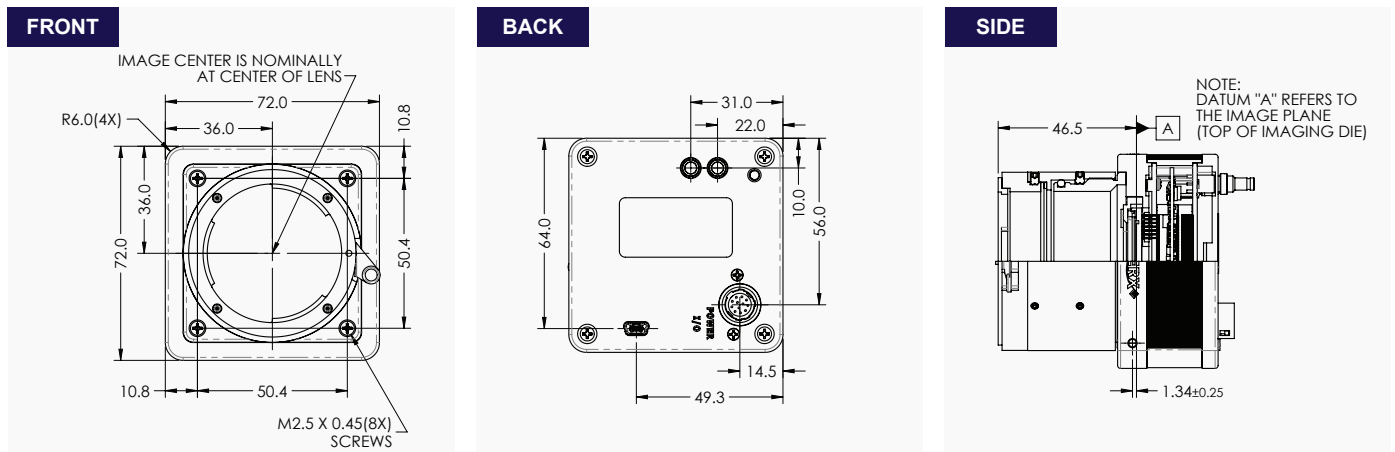

## Ordering Information

<b>Interface Available</b>		<b>Lens Mounts</b>	
2-channel CXP-6	Camera Link Full (CLF)	F-Mount (Default)	
CoaXPress		M42	
USB3	GigE Vision	EF Canon	
<b>Sensor Types available</b>		<b>Accessories (Sold separately)</b>	
Monochrome		PS12V04A-Power Supply w/ 1 input and 1 output	
Bayer Color			
NIR			

## GenICam Compliant Camera Configurator

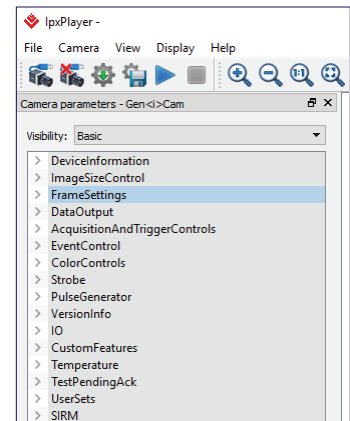

## Hirose Connectors

<b>Power and I/O Interface</b>	
	<ul style="list-style-type: none"> <li>1. Reserved</li> <li>2. Reserved</li> <li>3. Reserved</li> <li>4. Reserved</li> <li>5. OUT2 OPTO -</li> <li>6. OUT1 TTL Gnd</li> <li>7. OUT1 TTL Signal</li> <li>8. IN1 OPTO +</li> <li>9. IN2 TTL Signal</li> <li>10. IN1 OPTO -</li> <li>11. IN2 TTL Gnd</li> <li>12. OUT2 OPTO +</li> </ul>



IMPERX 6421 Congress Ave., Boca Raton, FL 33487, USA  
Tel: +1-561-989-0006. Email: sales@imperx.com

Quality Management System ISO 9001:2015 Registered  
Environmental Management System ISO 14001:2015 Registered  
DDTC Registered (Directorate of Defense Trade Controls, US Department of State)

[WWW.IMPERX.COM](http://WWW.IMPERX.COM)

Technical data has been fully checked, but accuracy of printed matter is not guaranteed. Subject to change without notice. Copyright 2017.